

AL101 Leak Protection Device, Indoor Alarm Part No.: AL101-5-5R Indoor Alarm Panel

The Model AL101-5-5R is an Indoor alarm panel that accepts five switch contact inputs and provides an audible alarm signal when the external contacts are closed. It must be mounted in a non-hazardous location. The white pilot light indicates the 120 VAC power. The TEST push-button is a momentary button that turns on the five red lights and the horn. The red pilot lights provide the visual alarm indication for each alarm contact. The MUTE push-button is a momentary button that mutes the horn for the five alarm inputs. In the event of a power failure the alarm will come back on with the power. The red light remains on until the alarm condition is corrected. The alarm circuit resets automatically. The panel also has a relay dry contact output for each switch input. Use Ktech float switches for the alarm input contacts.

Electrical Specifications

- 120 VAC, 60 Hz, 150mA
- Switch inputs at terminals **3&4, 5&6, 7&8, 9&10, 11&12**
- Relay outputs at terminals **13&14, 15&16, 17&18, 19&20, 21&22**
- Wire Gauge Range is 20-10AWG
- Buzzer -- 95 dB @ 1 ft.




LISTED OVERFILL
PROTECTION DEVICES &
NONVOLUMETRIC
LEAK DETECTION DEVICES
4YC9

CAN/ULC-S661-10
CAN/ULC-S675.2-14



Certified to CSA C22.2 No.205 and Conforms to UL2017
CAUTION: REFER TO INSTRUCTIONS BEFORE OPERATING ALARMS

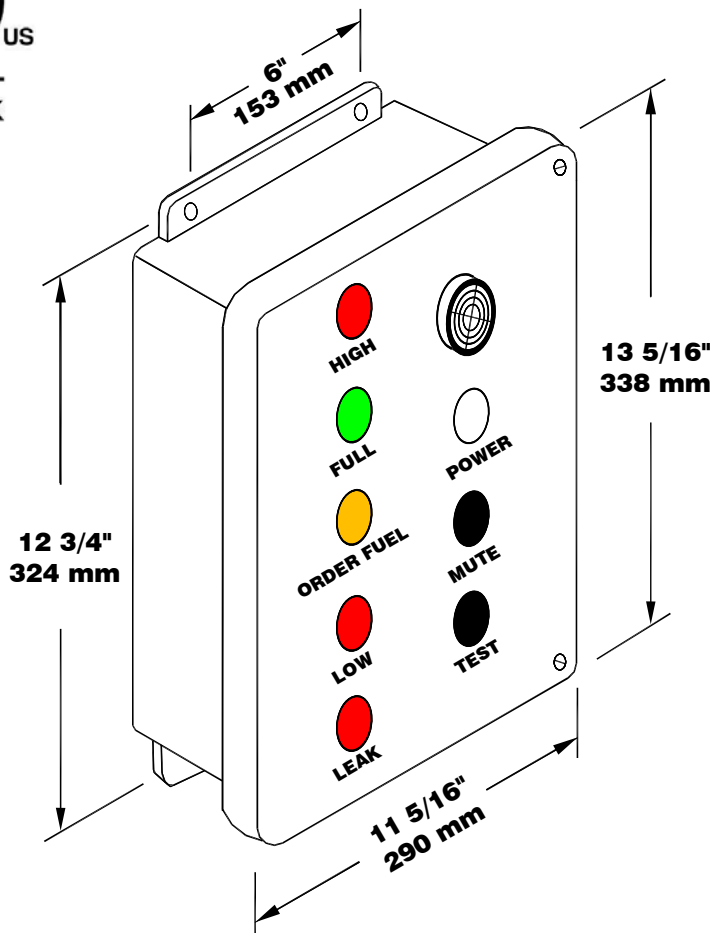


120VAC - Line	+ 1 +
Neutral	+ 2 +
HIGH	+ 3 +
HIGH	+ 4 +
FULL	+ 5 +
FULL	+ 6 +
ORDER FUEL	+ 7 +
ORDER FUEL	+ 8 +
LOW	+ 9 +
LOW	+ 10 +
LEAK	+ 11 +
LEAK	+ 12 +
High Relay-Common	+ 13 +
High Relay-NO	+ 14 +
Full Relay-Common	+ 15 +
Full Relay-NO	+ 16 +
Order Fuel Relay-Common	+ 17 +
Order Fuel Relay-NO	+ 18 +
Common Relay-Common	+ 19 +
Common Relay-NO	+ 20 +

AL101 Dispositif de protection contre les fuites, alarme intérieure No. d'article : Panneau d'alarme unique d'intérieur AL101-5-5R

Le modèle AL101-5-5R est un panneau d'alarme intérieur qui accepte cinq entrées de contact de commutation et fournit un signal d'alarme sonore lorsque les contacts externes sont fermés. Il doit être monté dans un endroit non dangereux. Le témoin lumineux blanc indique la puissance de 120 VCA. Le bouton-poussoir TEST est un bouton momentané qui allume les cinq feux rouges et l'avertisseur sonore. Les témoins lumineux rouges fournissent l'indication visuelle d'alarme pour chaque contact d'alarme. Le bouton-poussoir MUTE est un bouton momentané qui coupe le klaxon pour les cinq entrées d'alarme. En cas de panne de courant, l'alarme se remet en marche. Le voyant rouge reste allumé jusqu'à ce que la condition d'alarme soit corrigée. Le circuit d'alarme se réinitialise automatiquement. Le panneau a également une sortie de contact sec de relais pour chaque entrée de commutateur. Utilisez des interrupteurs à flotteur Ktech pour les contacts d'entrée d'alarme.

Spécifications électriques

- 120 VCA, 60 Hz, 150mA
- Entrées pour interrupteurs aux bornes **3et4, 5et6, 7et8, 9et10, 11et12**
- Sorties pour relais aux bornes **13et14, 15et16, 17et18, 19et20, 21et22**
- 20-10AWG
- Sonnerie -- 95 dB @ 1 pied.

 Dispositifs anti-débordement enregistrés & Dispositifs de détection des fuites non volumétriques 4YC9
CAN/ULC-S661-10
CAN/ULC-S675.2-14



Certifié en vertu de CSA C22.2 No.205 et conforme à la norme UL2017
MISE EN GARDE: VEUILLEZ CONSULTER LE MODE D'EMPLOI AVANT D'UTILISER L'ALARME

