

Ktech INDUSTRIAL PRODUCTS INC.

AL201 Overfill Protection Device Weatherproof Alarm

Part No.: AL201-3-3R-TT Weatherproof Alarm

The Model AL201-3-3R-TT is a weatherproof alarm panel that accepts three switch contact inputs and provides an audible alarm signal when the external contacts are closed. The white pilot light indicates the 120 VAC power. The TEST push-button is a momentary button that turns on the three red lights and the horn. The red pilot lights provide the visual alarm indication for each alarm contact. The MUTE push-button is a momentary button that mutes the horn for the three alarm inputs. In addition, there is a timer circuit that silences the horn automatically in 60 seconds. In the event of a power failure the alarm will come back on with the power for 60 seconds. The red light remains on until the alarm condition is corrected. The alarm circuit resets automatically. The panel also has a relay dry contact output for each switch input. It must be mounted in a non-hazardous location. Use Ktech float switches for the alarm input contacts. The panel is ULC Type 4 rated (Equivalent to Nema 4).

Electrical Specifications

- 120VAC, 60 Hz, 300 mA
- Switch inputs at terminals **3&4, 5&6, 7&8**
- Relay outputs at terminals **9&10, 11&12, 13&14**
- Wire Gauge Range is 20-10AWG
- Horn -- 95 dB @ 10 feet.





LISTED
OVERFILL
PROTECTION
DEVICES
4YC9

CAN/ULC-S661-10



Certified to CSA C22.2 No.205 and Conforms to UL2017

CAUTION: REFER TO INSTRUCTIONS BEFORE OPERATING ALARMS

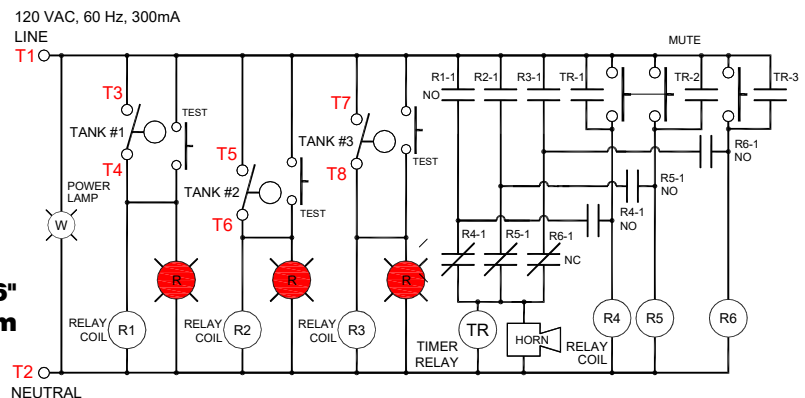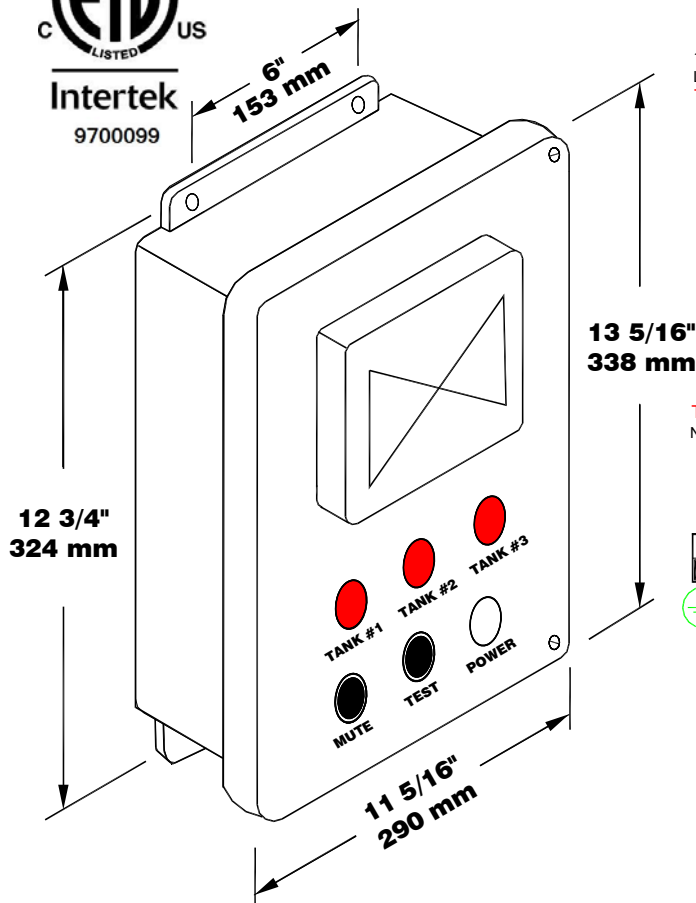

1	2	3	4	5	6	7	8	9	10	11	12	13	14
120VAC - LINE	NEUTRAL	TANK #1	TANK #2	TANK #3	TANK #3	TANK #3	TANK #3	TANK #1 RELAY COM	TANK #1 RELAY NO	TANK #2 RELAY COM	TANK #2 RELAY NO	TANK #3 RELAY COM	TANK #3 RELAY NO
Dry Contact Float Switch Inputs								Dry Contact Outputs					

