

AL201 Overfill Protection Device Weatherproof Alarm Part No.: AL201-7-7TR-FS Weatherproof Alarm



The Model AL201-7-7TR-FS is a weatherproof fail safe alarm panel that accepts seven N.C. switch contact inputs and provides an audible alarm signal and a delayed open dry contact output when the external contacts are opened. The white pilot light indicates the 120 VAC power. The TEST push-button is a momentary button that turns on the seven red lights and the horn. The red pilot lights provide the visual alarm indication for each alarm contact. When the unit goes into alarm a delay on timer is started and the contact output will open in 15 minutes, there is one timer output for each alarm. The MUTE push-button is a momentary button that mutes the horn for the seven alarm inputs. In the event of a power failure the alarm will come back on with the power. The red light remains on until the alarm condition is corrected. The alarm circuit resets automatically. It must be mounted in a non-hazardous location. Use Ktech float switches for the alarm input contacts. The panel is ULC Type 4 rated (Equivalent to Nema 4).

Electrical Specifications

- 120VAC, 60 Hz, 500 mA
- Switch inputs at terminals **3&4, 5&6, 7&8, 9&10, 11&12, 13&14, 15&16**
- Relay outputs at terminals **17&18, 19&20, 21&22, 23&24, 25&26, 27&28, 29&30**
- Wire Gauge Range is 20-10AWG
- Horn -- 95 dB @ 10 feet.



Certified to CSA C22.2 No.205 and Conforms to UL2017
CAUTION: REFER TO INSTRUCTIONS BEFORE OPERATING ALARMS

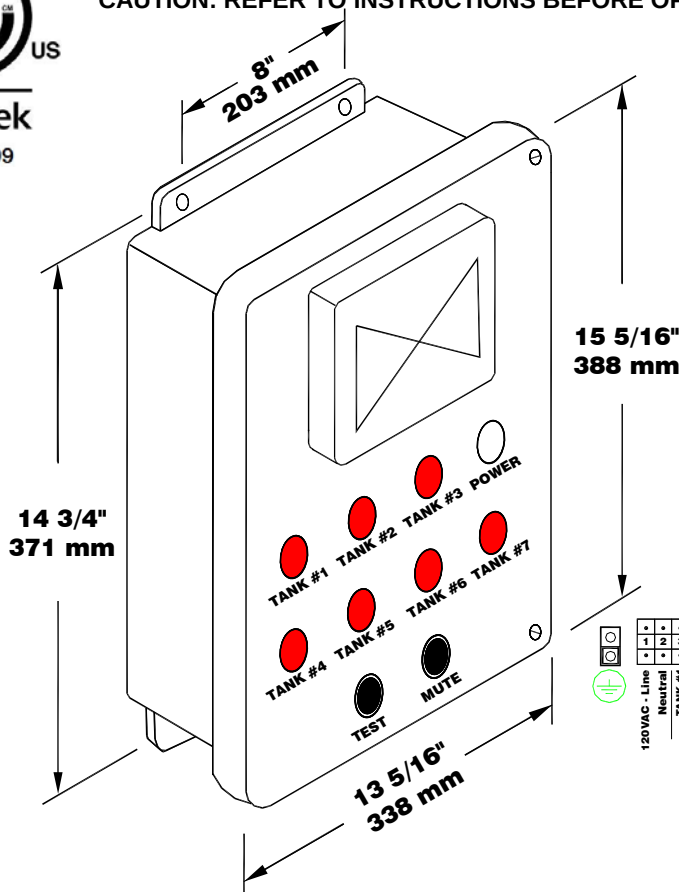

120VAC - Line	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Neutral	TANK #1	TANK #2	TANK #3	TANK #4	TANK #5	TANK #6	TANK #7	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM	TIMER-NC	TIMER-COM
Normally Closed Float Switch Inputs																	Time Delayed Dry Contact Outputs(15min)													

(NO/NC) normal refers to the shelf state of the relay.

Alarme imperméable pour dispositif anti-débordement AL201 Alarme imperméable Modèle AL201-7-7TR-FS



Le modèle AL201-7-7TR-FS est un panneau d'alarme à sécurité intégrée résistant aux intempéries qui accepte sept entrées de contact de commutateur N.F. et fournit un signal d'alarme sonore et une sortie de contact sec ouvert retardée lorsque les contacts externes sont ouverts. La veilleuse blanche indique l'alimentation 120 VAC. Le bouton-poussoir de TEST est un bouton momentané qui allume les sept feux rouges et le klaxon. Les voyants rouges fournissent l'indication d'alarme visuelle pour chaque contact d'alarme. Lorsque l'appareil passe en mode d'alarme, une temporisation est déclenchée et la sortie de contact s'ouvre en 15 minutes. Il y a une sortie de temporisation pour chaque alarme. Le bouton-poussoir MUTE est un bouton momentané qui coupe le klaxon pour les sept entrées d'alarme. En cas de panne de courant, l'alarme se rallume. Le voyant rouge reste allumé jusqu'à ce que la condition d'alarme soit corrigée. Le circuit d'alarme se réinitialise automatiquement. Il doit être monté dans un endroit non dangereux. Utilisez les interrupteurs à flotteur Ktech pour les contacts d'entrée d'alarme. Le panneau est classé ULC de type 4 (équivalent à Nema 4).

Spécifications électriques

- 120 VCA, 60 Hz, 500 mA
- Entrées pour interrupteurs aux bornes 3et4, 5et6, 7et8, 9et10, 11et12, 13et14, 15et16
- Sorties pour relais aux bornes 17et18, 19et20, 21et22, 23et24, 25et26, 27et28, 29et30
- 20-10AWG
- Sirène – 95 dB à 3 mètres



Certifié en vertu de CSA C22.2 No.205 et conforme à la norme UL2017
MISE EN GARDE: VEUILLEZ CONSULTER LE MODE D'EMPLOI AVANT D'UTILISER L'ALARME

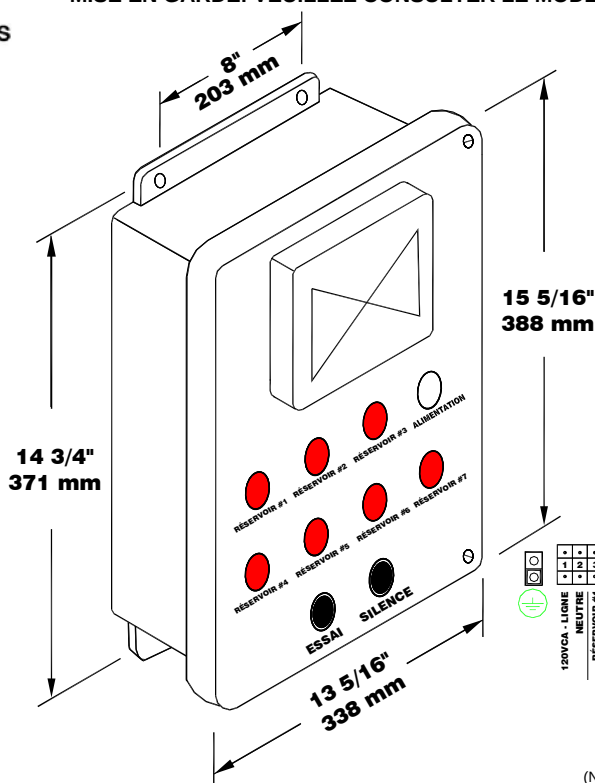

120VCA - LIGNE	NEUTRE	RESERVOIR #1	RESERVOIR #2	RESERVOIR #3	RESERVOIR #4	RESERVOIR #5	RESERVOIR #6	RESERVOIR #7	RESERVOIR #1 MINUTEUR-CON	RESERVOIR #2 MINUTEUR-CON	RESERVOIR #3 MINUTEUR-CON	RESERVOIR #4 MINUTEUR-CON	RESERVOIR #5 MINUTEUR-CON	RESERVOIR #6 MINUTEUR-CON	RESERVOIR #7 MINUTEUR-CON
Entrées de Contact Sec															
Sortie contact sec															

(NO / NC) se réfère normalement à l'état du relais de la tablette.